

Home  
PBXware  
SERVERware  
TELCOware  
SIPmon  
SIPProt  
Desktop & Mobile  
BRM  
UADs  
Appliances  
EOL

## From Bicom Systems Wiki

### Contents

- 1 Introduction
- 2 Video Tutorial
- 3 Requirements
  - 3.1 Identifying phone model
  - 3.2 Phone firmware
  - 3.3 DHCP server
  - 3.4 PBXware version
- 4 Installation
  - 4.1 Power adapter
  - 4.2 Power over Ethernet (PoE)
  - 4.3 Reset to factory settings
- 5 Registering phone
  - 5.1 Manual configuration
  - 5.2 Auto provisioning

## Introduction



This Configuration Guide is written as general guide on how to configure the Polycom phone model VVX 150 to work with PBXware 5.3.4.

## Video Tutorial

Video tutorial explaining Auto Provisioning setup for Polycom Phone on PBXware 5.

## Requirements

### Identifying phone model

To start and successfully complete registration of your Polycom phone you need to know which phone model you will setup.

From the back of each Polycom phone there are exact model information that you should check. Although different phone models can have exactly the same requirements and installation procedure, phone models can also have significantly different requirements and installation procedure, so that ignorance of your own model may result in the inability to successfully set up your phone.

### Phone firmware

Make sure that your phone is loaded with firmware version 6.0.0, and Polycom firmware pack is

downloaded and extracted to tftp folder on server. For more information please visit Polycom firmware installation page.

## DHCP server

Fully configured and operational DHCP server.

## PBXware version

In order to find out the PBXware version, please login to PBXware and navigate to Settings: About. On the top of **About** page is a code similar to this one "PBXware Edition: Business, Release: 5.3.4 (041373f), Running: 1.4.24-gc-75ee203", where "Release" denotes the exact version of your PBXware.

# Installation

This chapter describes how to install and connect the phone to the electrical power and data network as well as how to apply factory settings.

The following topics are covered:

- Power adapter
- Power over Ethernet (PoE)
- Factory settings

## Power adapter

Connect the Network and Power

- Connect the DC plug on the power adapter to the DC port on the phone and connect the other end of the power adapter into an electrical power outlet.
- Connect the ethernet cable between the Internet port on the phone and the network port on a router or switch to access LAN.

**NOTE:** *If you are using Power over Ethernet (PoE), you don't need to connect the AC adapter. Make sure the Ethernet cable and router or switch is Power over Ethernet (PoE) compliant.*

## Power over Ethernet (PoE)

Connect the Network (only)

Using a regular ethernet cable your phone can be powered from a Power over Ethernet (PoE) compliant router or switch.

- Connect the Ethernet cable between the Internet port on the phone and an available port on the in-line power router or switch.

**NOTE:** *If you are using Power over Ethernet (PoE), you don't need to connect the AC adapter. Make sure the Ethernet cable and router or switch is Power over Ethernet (PoE) compliant.*

## Reset to factory settings

Reset to factory settings.

This step is not required for out-of-the-box phones, however, if the phone has been already used then it is a must.

- Press **Home** button.
- Go to **Settings** and press the **Select** button.
- Go to **Advanced** and press the **Select** button.
- You'll be asked to enter password, enter your password (default password **456**), press the **Enter** button.
- Go to **Administration Settings** and press the **Select** button.
- Go to **Reset to Defaults** and press the **Select** button.
- Go to **Reset To Factory** and press the **Select** button.
- Confirm your action by pressing the **Yes** button.

## Registering phone

This chapter describes how to identify Polycom phone model, requirements that must be met and how to register the phone using manual configuration or auto provisioning.

The following topics are covered:

- Manual configuration
- Auto provisioning


## Manual configuration

This chapter describes how to set UAD settings, create PBXware extension and register the phone.

The following topics are covered:

- UAD settings
- Creating extension
- Registering phone

## UAD Settings

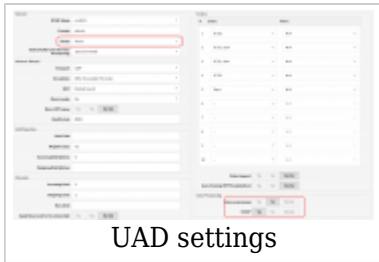

Login to PBXware web administration interface.

- Open a new browser window and enter the IP address in order to access the PBXware web administration login screen. Example: **http://192.168.1.10**
- Login to PBXware with your e-mail address and password.

UAD settings

- Navigate to **Settings:UAD**.
- Make sure Polycom UAD is enabled. To check the UAD status click on the **edit** icon corresponding to your Polycom phone.
- Make sure **Status** is set to **Active**, **Auto provisioning** is set to **No**, and **DHCP** is set to **Yes**.
- Click on the **Save** button to save changes.

## Creating extension



Add extension.

- Navigate to **Extensions**. Click on **Add Extension**.
- The standard options window will be shown below.
- Select Polycom phone model from the **UAD** select box.
- Select Location: **Local** or **Remote**.

**Local** is for all extensions registered on the LAN and **Remote** is for all extensions registered from remote networks, WAN, Internet etc.

- Click on the **Next step** button.

Extension values.

Enter values into the required field text boxes.

### **REQUIRED FIELDS:**

- **Name**

Enter a name for the extension being created. Example: **John Smith**.

- **E-mail**

Enter the e-mail address associated with this extension. This e-mail address will receive all system notification messages. Example: **john.smith@bicomsystems.com**.

- Click on the **Save** button.

## **Registering phone**

This chapter describes how to register Polycom phone using **Hostname or IP Address**, or **DNS SRV**.

The following topics are covered:

- Hostname or IP Address
- DNS SRV

## **Registering your device**

A) Line configuration from devices web interface.

To access the web interface of your Polycom phone, first you must know it's IP address on your network.

To find the IP address of your device please:

- Press the **Home** button.
- Go to **Settings** and press the **Select** button.
- Go to **Status** and press the **Select** button.
- Go to **Network** and press the **Select** button.
- Go to **TCP/IP Parameters** and press the **Select** button.
- IP address is displayed under IP: e.g. 192.168.8.198
- Then in your web browser enter the **IP address** of your Phone, if everything is OK, you should be displayed with **Password prompt**. If your Polycom device is at factory defaults the password should be **456**.

NOTE: Depending on your Polycom device and its firmware, web interface settings may vary.

- After you log in, under **VIEWS** you should select **Simple Setup**.
- Then use the toggling show/hide button to reveal the content of the **SIP Server** group.
- Enter your PBXware IP address into **Address** field.
- Enter **5060** into **Port** field.
- After this has been completed you should then use the toggling show/hide button to reveal the content of the **IP Line Identification**

- Enter extension into the **Address** field.
- Enter extension into the **Authentication User ID** field.
- Enter extension secret into the **Authentication Password** field.
- Press **Save** button to preserve changes. Your phone should register after couple of seconds, if not, please reboot your phone.

#### B) Line configuration on device

- Press the **Home** button on your phone.
- Go to **Settings** and press the **Select** button.
- Go to **Advanced** and press the **Select** button.
- Enter **password** and press the **Enter** button. Please note, factory default password is **456**.
- Press the **Select** button to enter **Administration Settings**.
- Go to **Line Configuration** and press the **Select** button.
- Go to **Line 1** and press the **Select** button.
- Go to **Address** and press the **Edit** button and enter PBXware extension number. Example: **1003** and press the **Ok** button.
- Go to **Authentication** and press the **Select** button.
- Go to **User ID:** and press the **Edit** button. Enter PBXware extension number then press the **Ok** button.
- Go to **Password** and press the **Edit** button, enter PBXware extension secret e.g. **%3DfChBz59**, then press the **Ok** button.
- Press the **Back** button three times.
- Press the **Select** button for **Save Config**.
- Press the **Home** button on your phone.
- Go to **Settings** and press the **Select** button.
- Go to **Advanced** and press the **Select** button.
- Enter the **password** and press the **Enter** button. Please note, factory default password is **456**.
- Press the **Select** button to enter **Administration Settings**.
- Go to **Call Server Configuration** and press the **Select** button.
- Press the **Select** button to enter **SIP**.
- Press the **Select** button to enter **Server 1**.
- Press the **Edit** button to edit **Address** and enter PBXware IP address e.g. **192.168.8.185** then press the **Ok** button.
- Press the **Back** button three times.

- Press the **Select** button for **Save Config**.
- If everything is done as above described, you should have successfully registered your phone to PBXware. Dial **\*123** to verify registration.

## DNS SRV

The screenshot shows the 'Admin Provisioning' configuration page. It includes fields for 'LAMP Hostname IP', 'PBXware Hostname IP', 'Max. Number of registers', 'pbXware SIP server', and 'pbXware SIP port'. Below these is a table for 'Enable SIP' with columns for 'Yes', 'No', and 'Not Set'. The 'Use DNS SRV when possible' checkbox is checked and circled in red. At the bottom, there is a field for 'PBXware SIP DNS SRV'.

DNS SRV

This chapter describes how to use a **DNS SRV** record which specifies the location of the PBXware. **NOTE:** *Your DNS Server needs to be configured correctly for this to work. Bicom Systems can provide service to set up this for you.*

Check if the DNS SRV is enabled in your PBXware

- Contact your PBXware administrator to find out if the **DNS SRV** is enabled in your PBXware, or if you have access to the PBXware you can check this yourself.
- Open a new browser window and enter the IP address in order to access the PBXware web administration login screen. Example: **http://192.168.1.10**.
- Login to PBXware with your e-mail address and password.
- Navigate to **Settings: Servers**. Click on the server corresponding **edit** button.
- In **Auto Provisioning group**, make sure **Use DNS SRV when possible:** is set to **Yes**. If it is set to **No** or **N/A**, set to **Yes** and click on the **Save** button. **NOTE:** *You must re-save all your extensions configured for Auto Provisioning.*

Configure Line

- Press the **Menu** button on your phone.
- Scroll to **Settings** and press the **Select** button.
- Scroll to **Advanced** and press the **Select** button.
- Enter **password** and press the **Enter** button. Please note, factory default password is **456**.
- Press the **Select** button to enter **Admin Settings**.
- Go to **Line Configuration** and press the **Select** button.
- Go to **Line 1** and press the **Select** button.
- Go to **Server 1** and press the **Select** button.
- Press the **Edit** button to edit **Address** line and enter the Hostname.
- Example for the Hostname: **abc.bicomsystems.com**
- Make sure you replace Hostname from this example with your PBXware Hostname.
- Make sure DNS server is configured to automatically route registration request to a PBXware



which is actually under another domain name, example: **abc.bicomsystems.com**.

- Go to **Authentication** and press the **Select** button.
- Press **Edit** button to edit **User ID** enter PBXware extension number. Example: **1003**. Then press the Ok button.
- Go to **Password** and press the **Edit** button, enter secret of the extension as received in the e-mail associated with this extension. Example: **%3DfChBz59**. Then press the **Ok** button.
- Press the **Back** button twice, then press the **Select** button to **Save Configuration**.
- Auto provisioning process will start during phone reboot process, phone will pickup appropriate configuration file from PBXware. If everything is done as above described, you should have successfully registered your phone to PBXware. Dial **\*123** to verify registration.


## Auto provisioning

This chapter describes how to set UAD settings, create PBXware extension and register the phone using DHCP or Static IP address.

The following topics are covered:

- UAD settings
- Creating extension
- Registering phone

### UAD Settings

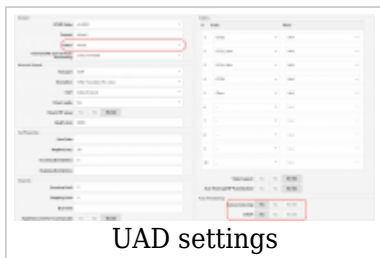

Login to PBXware web administration interface

- Open a new browser window and enter the IP address in order to access the PBXware web administration login screen. Example: **http://192.168.1.10**.
- Login to PBXware with your e-mail address and password.

UAD settings

- Navigate to **Settings:UAD**.
- Make sure Polycom UAD is enabled. To check the UAD status click on the **edit** icon corresponding to your Polycom phone.
- Make sure **Status** is set to **Active**, **Auto provisioning** is set to **Yes**, and **DHCP** is set to **Yes**.
- Click on the **Save** button to save changes.

## Creating Extension



### Add Extension

- Navigate to **Extensions**. Click on **Add Extension**.
- The standard options window will be shown below.
- Select Polycom phone model from the **UAD** select box.
- Select Location: **Local** or **Remote**.

**Local** is for all extensions registered on the LAN and **Remote** is for all extensions registered from remote networks, WAN, Internet etc.

- Click on the **Next step** button.

### Extension values

Enter values into the required field text boxes.

#### **REQUIRED FIELDS:**

- **Name**

Enter a name for the extension being created. Example: **John Smith**.

- **E-mail**

Enter the e-mail address associated with this extension. This e-mail address will receive all system notification messages. Example: **john.smith@bicomsystems.com**

- **Auto Provisioning**

Set to **Yes**.

- **MAC Address**

Enter Polycom phone MAC address. Example: **0004F2123456**. MAC address can be found at the back of the phone.

- Click on the **Save** button.

## Registering phone

This chapter describes how to register Polycom phone using **DHCP, TFTP, HTTP & HTTPS**.

The following topics are covered:

- DHCP
- TFTP or HTTP & HTTPS

## **DHCP**

Configure DHCP

- Make sure your DHCP router is configured to use **option 66** to automatically instruct phones with the URL for auto provisioning. For more information refer to your router documentation or contact your network administrator.

Phone first boot or user initiated reboot

- Auto provisioning process will start during phone first boot or after reboot process has been initiated by user. DHCP server will instruct the phone where from to pickup appropriate configuration file. If everything is done as above described, you should have successfully registered your phone to PBXware. Dial **\*123** to verify registration.

## **TFTP or HTTP & HTTPS**

Network Configuration

If there is no DHCP in your network, you can still auto provision your Polycom phone. Please refer to your Polycom phone model User Guide for instruction about setting static IP address. After you configure your Polycom phone to use a static IP address, continue with the following steps.

- Open a new browser window and enter your phone IP address, e.g. **https://192.168.1.22**.
- Enter **password** and press **Submit** button. **NOTE:** Factory default password is: **456**.
- Go to **Settings** in the upper navigation menu and choose **Provisioning Server**.
- You must choose one of the following **Server Type: HTTP, HTTPS or Trivial FTP** and press the **Select** button. **Please Note:** Our recommendation is to use the **Server Type HTTP**.
- Depending on what **Server Type** has been chosen into **Server Address** field type:

If the **Server Type** is **HTTP** or **HTTPS** enter followed by **Hostname** or **IP Address**, followed then by **/prov** and press **Ok**.

Example for Hostname using HTTP: **abc.bicomsystems.com/prov**

Example for Hostname using HTTPS: **abc.bicomsystems.com/prov**

Example for IP Address using HTTP: **192.168.1.10/prov**

Example for IP Address USING HTTPS: **192.168.1.10/prov**

Into **Server User** field enter your **HTTP username**.

Into **Server Password** field enter your **HTTP password**.

If the **Server Type** is **TFTP** enter **Hostname** or **IP Address**.

Example for Hostname: **abc.bicomsystems.com**.

Example for IP Address: **192.168.1.10**

- Click on **Save** button.
- Confirm by choosing **Yes**.

- Wait while the phone reboots.
- Auto provisioning process will start during phone reboot process, phone will pickup appropriate configuration file from PBXware. If everything is done as above described, you should have successfully registered your phone to PBXware. Dial **\*123** to verify registration.

Retrieved from "[http://wiki.bicomsystems.com/Polycom\\_VVX150](http://wiki.bicomsystems.com/Polycom_VVX150)"

---

Disclaimers - About Bicom Systems Wiki