


Home
PBXware
SERVERware
TELCOware
SIPmon
SIPProt
Desktop & Mobile
BRM
UADs
Appliances
EOL

From Bicom Systems Wiki

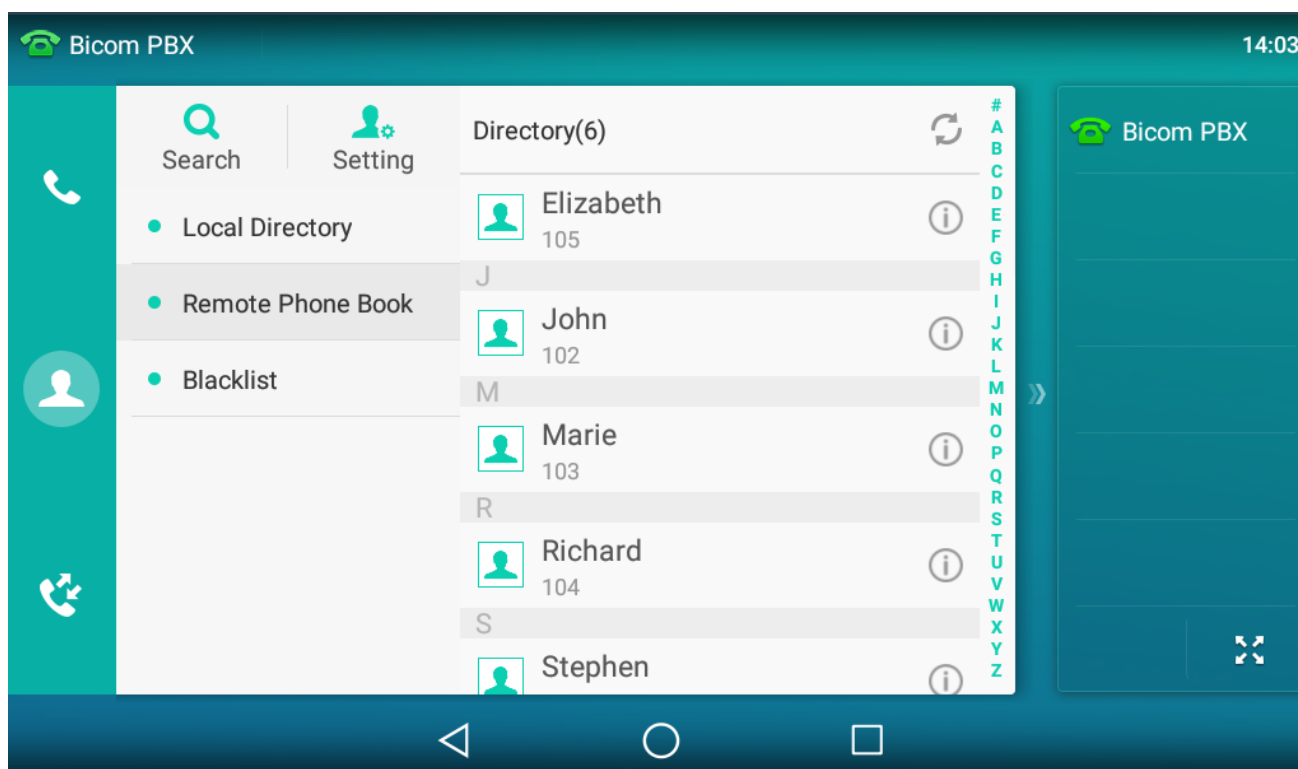

Remote directory is a very useful feature when a phone does not have speed dial buttons or expansion module. This Configuration Guide is written as general guide on how to enable and configure Remote Directory through provisioning.

Contents

- 1 Requirements
- 2 Configuration
 - 2.1 Enable Remote Directory
 - 2.2 Remove phone number from Directory

Requirements


To use Remote Directory, phone must be provisioned. To find out more info on how to provision a phone, check our Provisioning Guide: PBXware 5.3 End Points

Configuration

Enable Remote Directory

To enable Remote Directory follow these steps:

- Go to Settings -> Servers, or Settings -> Tenants and click **Edit** option.
- Click **Show Advanced Options**
- In the **General Settings** section set **Show Directory in OSC** to **Yes**

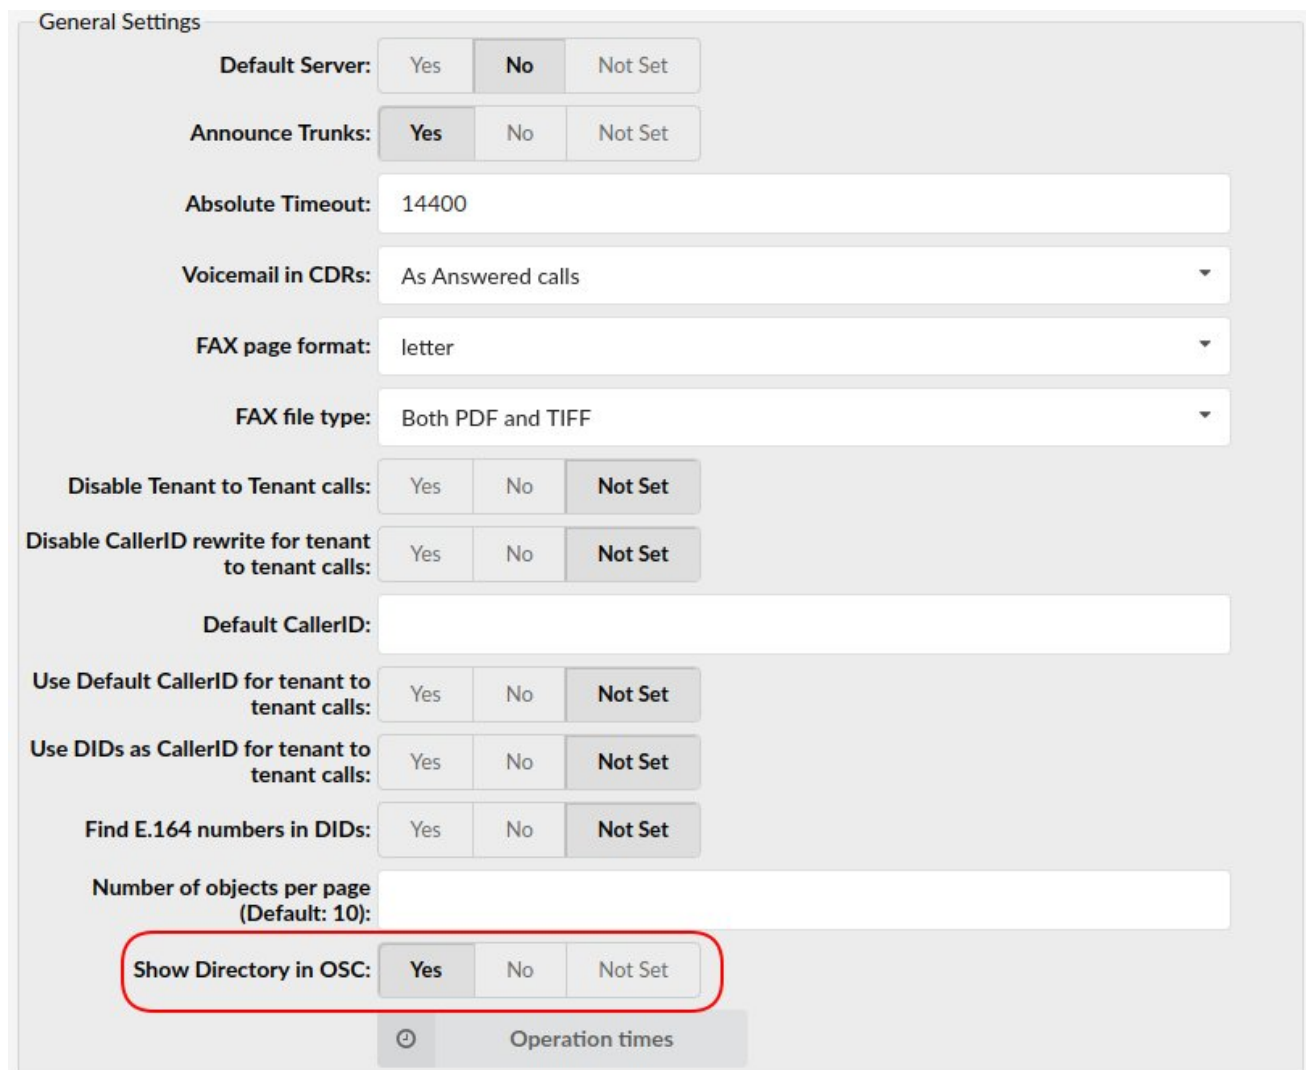

The screenshot shows the 'General Settings' page with various configuration options. The 'Show Directory in OSC' option is highlighted with a red circle. Below it is a 'Show Directory in OSC' button with 'Yes', 'No', and 'Not Set' options. At the bottom, there is a 'Save' button and an 'Operation times' button.

Setting	Yes	No	Not Set
Default Server:	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
Announce Trunks:	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
Absolute Timeout:	<input type="text" value="14400"/>		
Voicemail in CDRs:	<input type="text" value="As Answered calls"/>		
FAX page format:	<input type="text" value="letter"/>		
FAX file type:	<input type="text" value="Both PDF and TIFF"/>		
Disable Tenant to Tenant calls:	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Disable CallerID rewrite for tenant to tenant calls:	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Default CallerID:	<input type="text"/>		
Use Default CallerID for tenant to tenant calls:	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Use DIDs as CallerID for tenant to tenant calls:	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Find E.164 numbers in DIDs:	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Number of objects per page (Default: 10):	<input type="text"/>		
Show Directory in OSC:	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>

- Click **Save** button at the bottom of the page.
- Reboot the phone and open Directory menu on the phone. Remote directory should be displayed.

Remove phone number from Directory

If one wants to remove a phone number, for example 103 from Remote Directory, this feature must be disabled in the extension settings for this phone number:

- Go to **Extensions** and click **Edit** option on the extension 103
- Click **Show Advanced Options**
- In the **General Settings** section set **Show in Directory** to **No**

The screenshot shows the 'General' settings for extension 103. The fields are as follows:

Field	Value	Status
Extension:	103	✓
Title:		
Name:	John	✓
E-mail:	john@bicomsystems.com	✓
UAD:	Polycom VVX 600	
UAD Location:	Remote	
Label:		
Location:		
Department:	None x	✓
User Type:	friend	✓
DTMF Mode:	rfc2833	✓
Context:	t-200	✓
Status:	Active	✓
Music on Hold:	Please select ...	
Show In Directory:	Yes No Not Set	

The 'Show In Directory' field is highlighted with a red circle, and the 'No' option is selected.

- Click **Save** button.
- Reboot the phone and open Directory menu on the phone. Extension 103 should be removed from the list.

Retrieved from "http://wiki.bicomsystems.com/Remote_Directory"